

SINGLE SKIN HOOD-TYPE DISHWASHERS



FEATURES

- Four wash cycles.
- Visualization of wash and rinse temperatures, principal alarms, progression of the cycle.
- Hood operating start/stop functions.
- Tank deep-formed bottom.
- Pump filter.
- Built-in rinse-aid pump.
- Tank and boiler thermometers.
- Easily removable basket support
- Linear or corner layouts.
- Independent stainless steel wash arms and polypropylene and fiber of glass rinse arms.
- S/S surface filters.
- Extra power for cold water inlet.

OPTIONS

- Detergent dispenser
- Special voltages on request
- Insulation of the hood
- Built-in water softener available

TECHNICAL SPECIFICATIONS

- Dimensions: 720 x 735 x 1445 / 1880 H
- Power Supply: 400 V 3N ~ 50Hz
- Rack dimension: 500 x 500 mm

CAPACITY



Ø 410




500 x 500

RACK EQUIPMENT

- 2 x C40
- 1 x C44
- 2 x 15060



SINGLE SKIN HOOD-TYPE DISHWASHERS

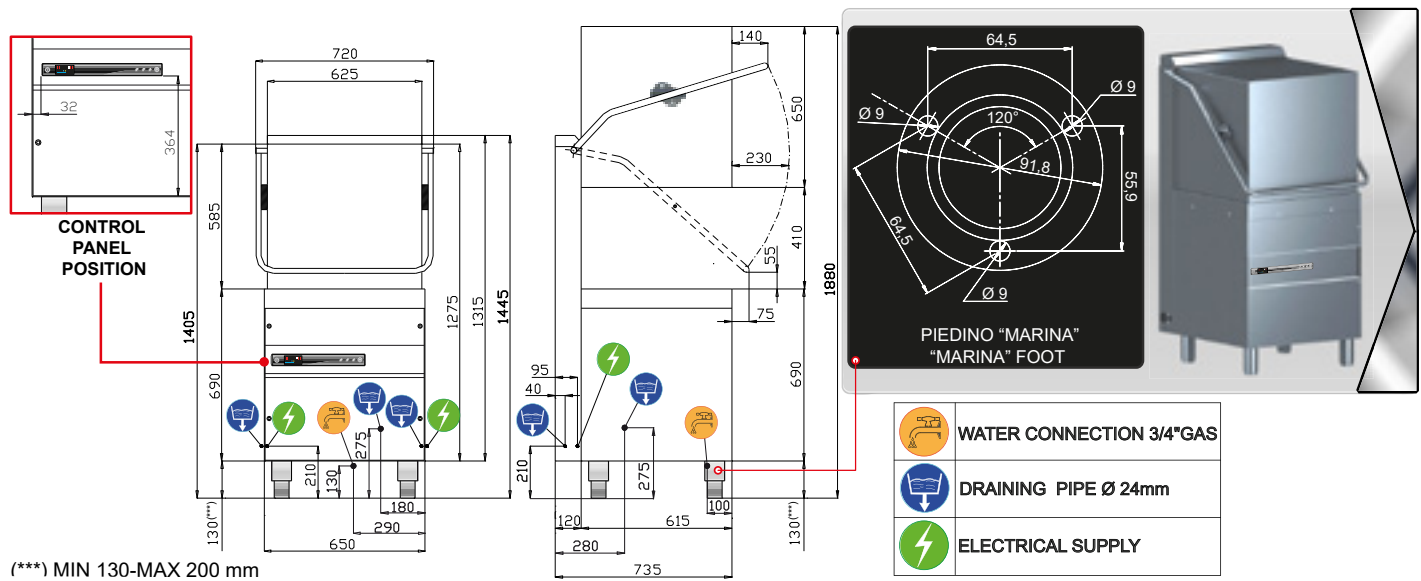

TECHNICAL DATA

EXTERNAL DIMENSIONS				
width	720 mm			
depth	735 mm			
height	1445/1880(open hood) mm			
WEIGHT	100 Kg			
VOLTAGE	400V 3N 50Hz			
POWER REQUIRED	13120 W			
WATER HARDNESS	2-8 °F			
INLET WATER PRESSURE	200-400 kPa			
CROCKERY DIMENSIONS				
plates diameter	410 mm			
trays max. dimension	GASTRONORM 1/1 (530x325)			
WASHING CYCLES	1 (50)	2 (80)	3 (120)	4 (180)
WATER SUPPLY 55°C				
racks/h*(*) (1)	72	45	30	20
WATER SUPPLY 10°C				
racks/h*(*) (1)	31	31	30	20
WATER CONSUMPTION / CYCLE (WATER PRESSURE 200KPA)	2.8 L			
BOILER CAPACITY	10 L			
BOILER HEATING ELEMENT	12000 W			
RINSING TEMPERATURE (SET)	85 °C			
TANK CAPACITY	30 L			
TANK HEATING ELEMENT	2700 W			
TANK TEMPERATURE (SET)	55 °C			
PUMP POWER	1120 W(630 L/min***)			

DRAIN PUMP (OPTIONAL)	25 W h MAX draining 0.8m (40 L/min***)
NOISE	63.6±0.7 dB(A)

(*) standard termostop (***) maximum flow rate

1. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.