



PRODUCT FEATURES

- Heated double glazed glass top, sides and front - chilled section
- Heated rear sub frame
- Sliding rear doors - chilled section
- Hinged rear door - ambient section
- Deck forced refrigeration
- Three adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser

Front doors not available for this model


CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			Shelving no.	Shelf length w x d	Base tray w x d	Total food units	Display m2
	Length mm	Depth mm	Height mm					
BTGRA10	1000	750	1380	3 + base	RF 615 x 445 AB 238 x 445	RF 615 x 480 AB 238 x 480	100 x 100 mm RF 102 AB 44	1.57

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

Refrigerant	Operating Current	Connection	Voltage
R134A	4.3 Amp	10amp 3 pin plug	50/60 Hertz 240V





ELECTRICAL POWER


Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required
Maximum ambient operating temperature climate class N max 32°C

Maximum shelf load weight 15kg
spread evenly



All units rear venting

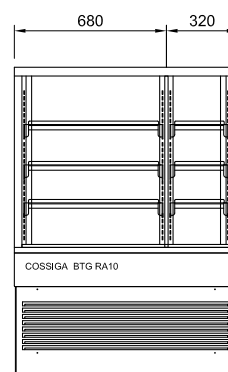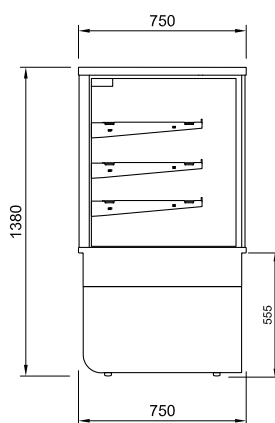

CUSTOMER SIDE

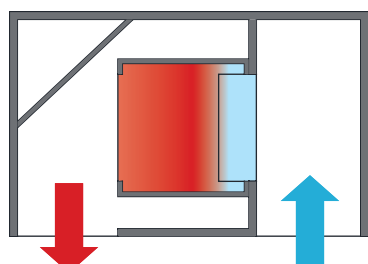

REAR VENTING



REAR VIEW



PRODUCT FEATURES

- Heated double glazed glass top, sides and front - chilled section
- Heated rear sub frame
- Sliding rear doors - chilled section
- Hinged rear door - ambient section
- Deck forced refrigeration
- Three adjustable shelves
- Ticket strips on shelves and base
- Under shelf and canopy LED lights
- Integral condenser

Front doors not available for this model


CABINET DIMENSIONS & SPECIFICATIONS

Refrigerated 4⁰ factory set point

Model	Cabinet			Shelving no.	Shelf length w x d	base tray w x d	Total food units	Display m2
	Length mm	Depth mm	Height mm					
BTGRA15	1500	750	1380	3 + base	RF 790 x 445 AB 564 x 445	RF790 x 510 AB 564 x 510	RF 124 AB 90	2.49

Prior to installation see, installation guidelines, ventilation requirements and drainage options documents

Refrigerant	Operating Current	Connection	Voltage
R134A	4.6 Amp	10amp 3 pin plug	50/60 Hertz 240V


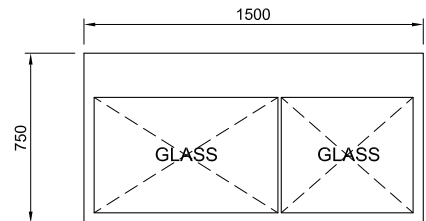


ELECTRICAL POWER


Electrical power cord 2200mm
3 pin 10 amp 1 phase socket required
Maximum ambient operating temperature climate class N max 32°C

Maximum shelf load weight 15kg
spread evenly



All units rear venting

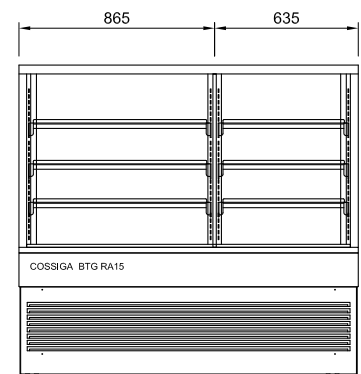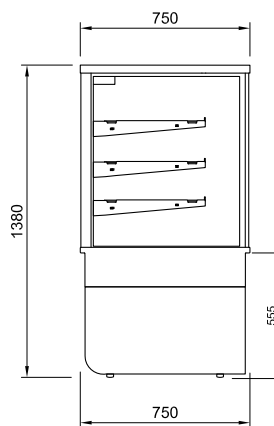

CUSTOMER SIDE

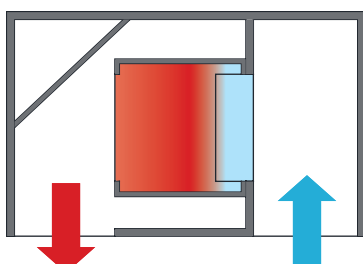

REAR VENTING

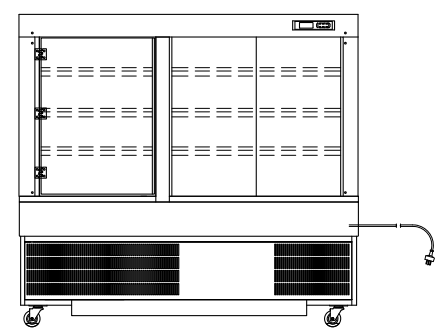

REAR VIEW