



## OG8401/P - Lincat Opus 800 Propane Gas Counter-top Chargrill - W 600 mm - 12.6 kW

Embrace the unique power and versatility of the Opus 800 Three-Zone Gas Chargrill, which provides three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks.

- ✓ Three heat zones which are capable of maintaining different temperatures on the same surface, allowing you to cook chicken fillets only inches away from steaks. Individual zones can be turned off during quiet periods.
- ✓ Highly powerful infra-red burners respond quicker and heat faster than standard burners allowing you to increase your output and achieve energy savings
- ✓ Heavy-duty cast iron branding grids with reversible design, for uninterrupted cooking and self cleaning at maximum power
- ✓ Flame failure protection
- ✓ Heavy duty radiant caps protect burners

### Specifications

Summary		Power and Performance	
<b>Brand</b>	Lincat	<b>BTU per Hour</b>	42,991
<b>Range</b>	Opus 800	<b>Total Power kW</b>	12.6
<b>Power Type</b>	Gas	<b>Cooking Area (Width x Depth) mm</b>	500 x 620
<b>Gas Type</b>	Propane Gas	<b>Temperature Control</b>	Mechanical
<b>Unit Type</b>	Counter-top		
<b>Available in UK Only</b>	No		
<b>UK Warranty</b>	2 Years Parts and Labour Warranty		
<b>Export Warranty</b>	Contact your local dealer		
<b>GTIN</b>	5056105102823		

Key Specifications		Capacity	
<b>Number of Heat Zones</b>	3	<b>Product Output per Hour</b>	78 x 225g [8oz] steaks [chilled]


Weights and Dimensions		Supply Connections	
<b>Unit Height (External) mm</b>	653	<b>Requires Installation</b>	Yes
<b>Unit Width (External) mm</b>	600	<b>Requires Electrical Supply</b>	No
<b>Unit Depth (External) mm</b>	806	<b>Gas Connection BSP</b>	1/2"
<b>Net Weight Kg</b>	80.5	<b>Gas Consumption at full rate Propane m³ per Hour</b>	0.9
		<b>Gas Pressure Propane mbar</b>	37
		<b>Total heat input at full rate Propane kW</b>	12.6
		<b>Total heat input at full rate Propane BTU per hour</b>	42,911

Shipping	
<b>Packed Weight Kg</b>	88.55
<b>Packed Height cm</b>	79
<b>Packed Width cm</b>	70
<b>Packed Depth cm</b>	85

Available Accessories

<b>CH01</b>	Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU
<b>CH02</b>	Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU
<b>OA8950</b>	Lincat Opus 800 Free-standing Floor Stand with Legs - for units W 600 mm
<b>OA8950/C</b>	Lincat Opus 800 Free-standing Floor Stand with Castors - for units W 600 mm
<b>RC03M</b>	RADIANT COVER - OPUS 800 - UNDER DEVELOPMENT

Technical Picture

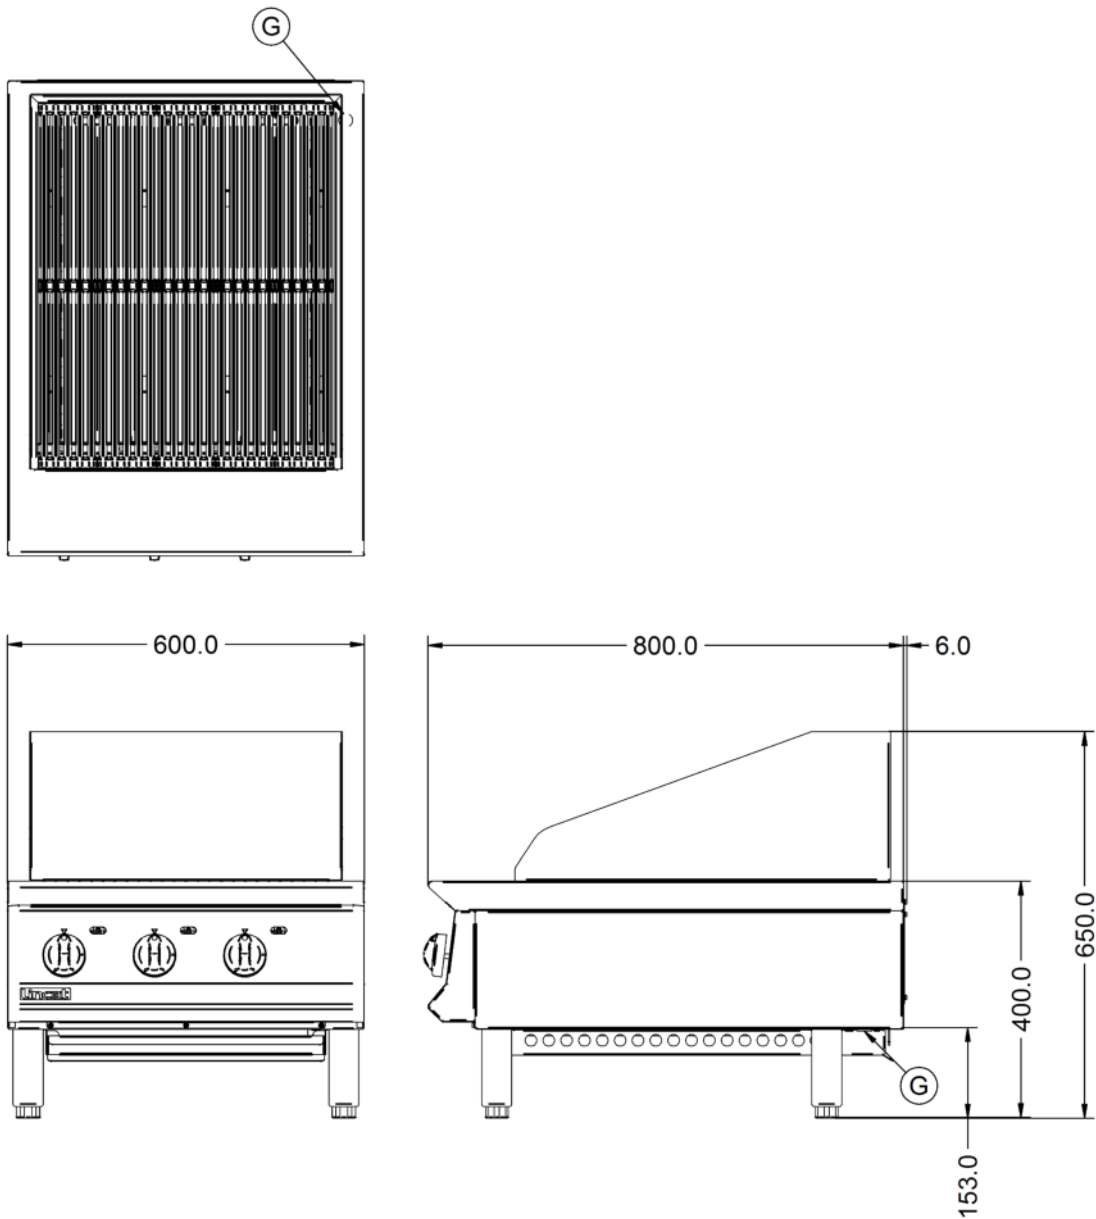



**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 875536  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm