

GLASS & DISHWASHERS WITH DOUBLE-WALL DOOR



FEATURES





- AISI 304 structure.
- Sound and heat proof door.
- Double skin door with security microswitch.
- Deep-drawn and sloped tank for a perfect total drain.
- Overflow and drain pipes integrated system, for a triple protection of the washing pump.
- Non-drip roof to safeguard the hygiene of the freshly washed dishes.
- Coupled light wash and rinse arms, granting the best efficiency also when the water pressure is weaker.
- Easy to remove nozzles, to help with daily cleaning operations.
- Back flow prevention valve.
- Rinse-aid dispenser (peristaltic version on demand).
- Thermostop system: the rinse starts only when the water in boiler reaches 85°C.
- Electronic version with 4 preset washing programs.
- Automatic regeneration for touch models with built-in water softener.
- Glasswashers available also with round basket.
- A further upper surface filter.
- New system of wash and rinse arms.
- Automatic water softener.

OPTIONAL


- Drain pump
- Detergent dispenser
- Special voltages on request
- Surface filters

TECHNICAL SPECIFICATIONS

- Dimensions: 590 x 600 x 850 mm
- Power Supply: 400V 3N 50Hz or 230V 50Hz
- Rack dimension: 500 x 500 mm

<p>CAPACITY</p>  320 H  Ø 345  500 x 500	<p>RACK EQUIPMENT</p> <ul style="list-style-type: none"> • 1 rack C40 • 1 rack C44 • 1 rack 15060 
--	---

GLASS & DISHWASHERS WITH DOUBLE-WALL DOOR

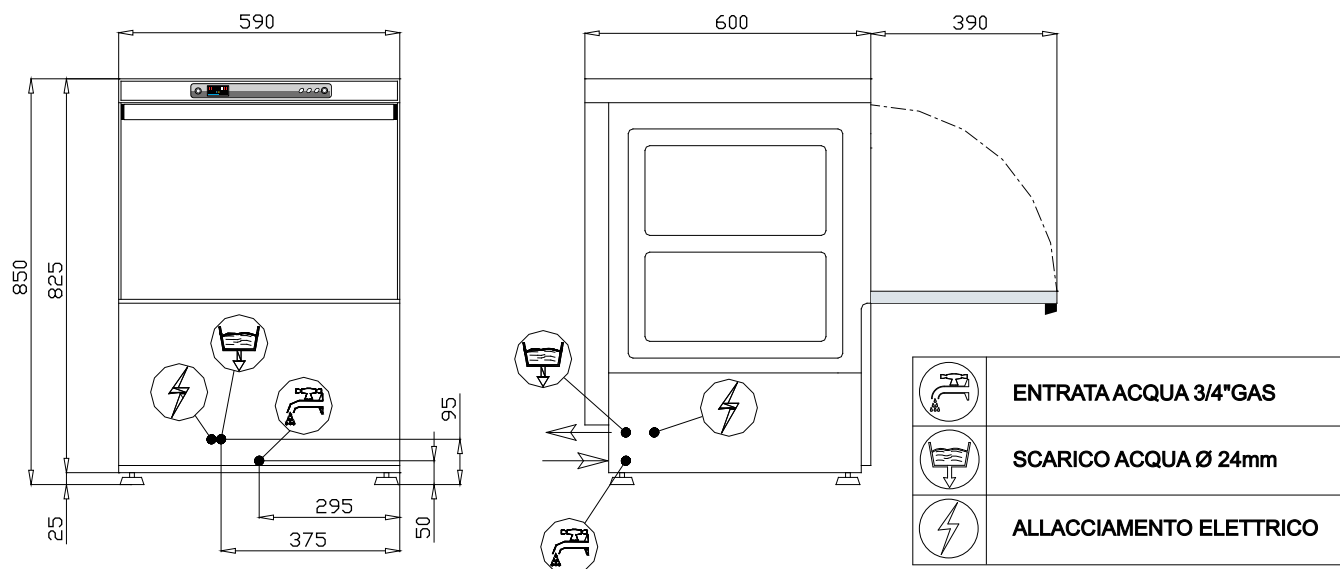

TECHNICAL DATA

EXTERNAL DIMENSIONS				
width	590 mm			
depth	600 mm			
height	850 mm			
WEIGHT	56.5 kg			
VOLTAGE	400V 3N 50Hz			
POWER REQUIRED	5150 W			
WATER HARDNESS	2-8 °F			
INLET WATER PRESSURE	200-400 kPa			
CROCKERY DIMENSIONS				
plates diameter	345 mm			
dishes max. height	320 mm			
WASHING CYCLES	1 (60)	2 (90)	3 (120)	4 (180)
WATER SUPPLY 55°C				
racks/h(*) (1)	60	40	30	20
WATER SUPPLY 10°C				
racks/h(*) (1)	20	20	20	20
WATER CONSUMPTION / CYCLE (water pressure 200kpa)	2.3 L			
BOILER CAPACITY	5.7 L			
BOILER HEATING ELEMENT	4500 W			
RINSING TEMPERATURE (SET)	85 °C			
TANK CAPACITY	29 L			
TANK HEATING ELEMENT	2700 W			
TANK TEMPERATURE (SET)	55 °C			

PUMP POWER	650 W (340 L/min ^{***})
DRAIN PUMP (optional)	25 W h MAX drainig 0.8m (40 L/min ^{***})
NOISE	63 dB(A)

(*) standard termostop (***) maximum flow rate

1. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.