



## OG8110/N - Lincat Opus 800 Natural Gas Free-standing Single Tank Fryer - 1 Basket - W 300 mm - 16.0 kW

The accurate Opus 800 Single-Tank Free Standing Gas Fryer comes with an accurate thermostatic control that goes up to 190°C, ensuring consistent results and safe operation.

- ✓ Accurate thermostatic control up to 190°C for consistent results and safe operation
- ✓ Externally fired heating gives easy access for cleaning tanks
- ✓ Convenient piezo ignition

### Specifications

#### Summary

|                             |                                   |
|-----------------------------|-----------------------------------|
| <b>Brand</b>                | Lincat                            |
| <b>Range</b>                | Opus 800                          |
| <b>Power Type</b>           | Gas                               |
| <b>Gas Type</b>             | Natural Gas                       |
| <b>Unit Type</b>            | Free-standing                     |
| <b>Available in UK Only</b> | No                                |
| <b>UK Warranty</b>          | 2 Years Parts and Labour Warranty |
| <b>Export Warranty</b>      | Contact your local dealer         |
| <b>GTIN</b>                 | 5056105103097                     |

#### Power and Performance

|                             |            |
|-----------------------------|------------|
| <b>BTU per Hour</b>         | 54,592     |
| <b>Total Power kW</b>       | 16.0       |
| <b>Temperature Range °C</b> | 90-190     |
| <b>Temperature Control</b>  | Mechanical |

#### Key Specifications

|                           |                  |
|---------------------------|------------------|
| <b>Number of Baskets</b>  | 1                |
| <b>Number of Tanks</b>    | 1                |
| <b>Gravity Filtration</b> | No               |
| <b>Pumped Filtration</b>  | No               |
| <b>Drain Location</b>     | Through the body |

#### Capacity

|                                |   |
|--------------------------------|---|
| <b>Product Output per Hour</b> | 22kg chips - 12mm [frozen], 32kg chips - 12mm [chi] |
| <b>Capacity Litres</b>         | 14.0  |

#### Weights and Dimensions

|                                  |      |
|----------------------------------|------|
| <b>Unit Height (External) mm</b> | 1020 |
| <b>Unit Width (External) mm</b>  | 300  |
| <b>Unit Depth (External) mm</b>  | 815  |
| <b>Net Weight Kg</b>             | 70   |

#### Supply Connections

|   |        |
|---|--------|
| <b>Requires Installation</b>                              | Yes    |
| <b>Requires Electrical Supply</b>                         | No     |
| <b>Gas Connection BSP</b>                                 | 1/2"   |
| <b>Gas Consumption at full rate Natural m³ per Hour</b>   | 1.52   |
| <b>Gas Pressure Natural mbar</b>                          | 20.0   |
| <b>Total heat input at full rate Natural kW</b>           | 16.0   |
| <b>Total heat input at full rate Natural BTU per hour</b> | 54,594 |

#### Shipping

|                         |     |
|-------------------------|-----|
| <b>Packed Weight Kg</b> | 77  |
| <b>Packed Height cm</b> | 122 |
| <b>Packed Width cm</b>  | 85  |
| <b>Packed Depth cm</b>  | 45  |


### Available Accessories

|             |   |
|-------------|---|
| <b>CH01</b> | Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU   |
| <b>CH02</b> | Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU |
| <b>LK02</b> | OPUS 350 LEG KIT  |

Available Accessories

|  |   |
|--|---|
| <p><b>OA8955</b></p> <p><b>OF1</b></p> | <p>SPLASHGUARD FRYERS - OPUS 800</p> <p>Oil filter kit - size 1</p> |
|--|---|

Technical Picture

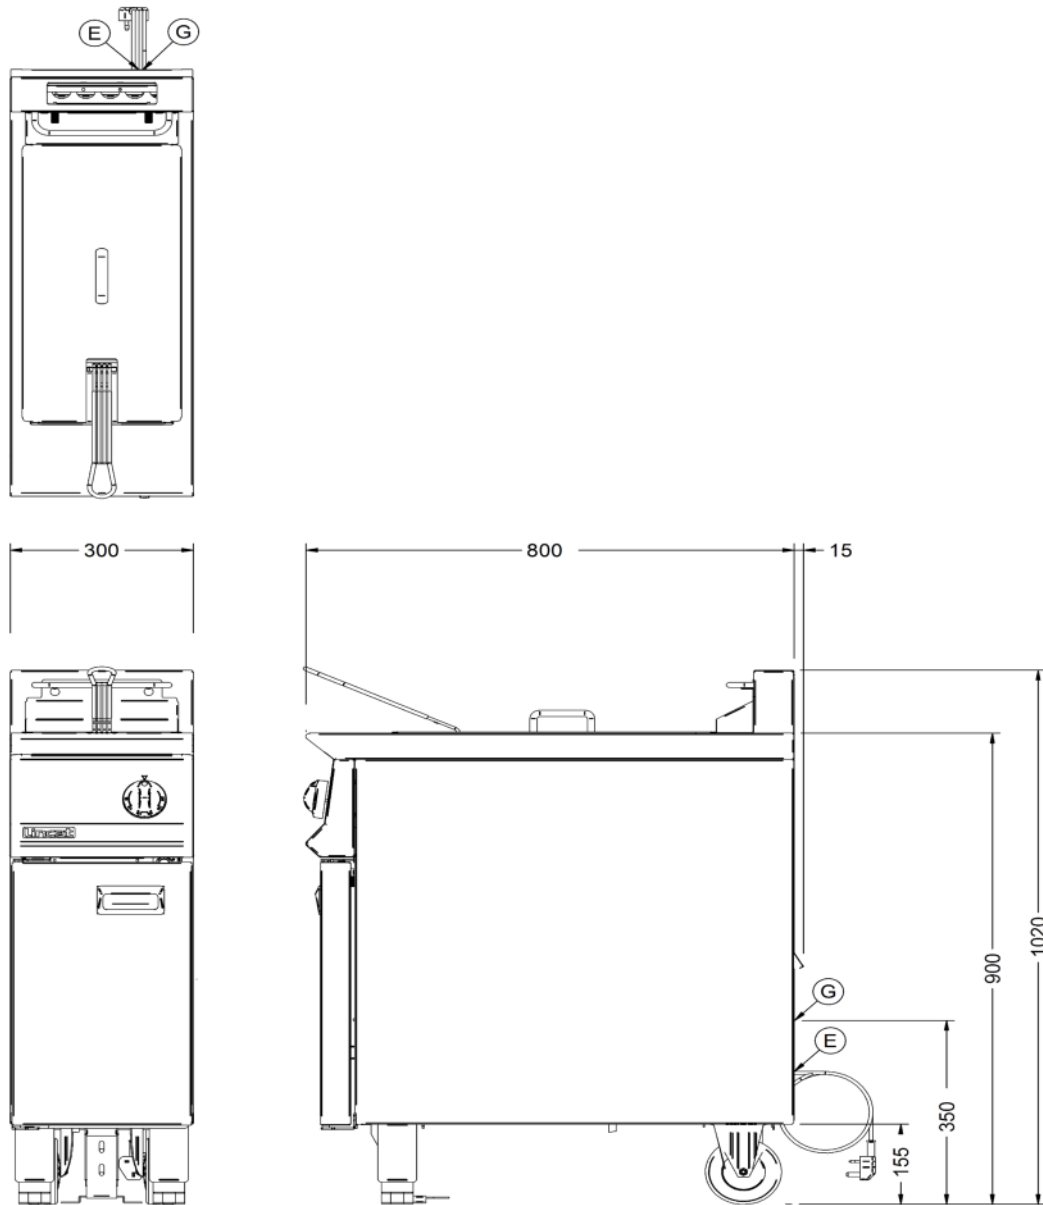



**Lincat Limited**

Whisby Road,  
Lincoln, LN6 3QZ,  
United Kingdom

**Company No:** 2175448

A member company of



**Customer Care**

**Tel:** +44 1522 875500  
**Email:** care@lincat.co.uk

**Export Customers**

**Tel:** +44 1522 875536  
**Email:** export@lincat.co.uk

**Opening Hours**

**Monday – Friday:**  
8.30am – 5pm