

NW 458



Scotsman
Ice Systems

Modular Ice Machine 230 kg

Item #:

Project:

Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Stackable: add flexibility!
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 458
Dice 10 g
W 22 x D 22 x H 22 mm



NW H 458
Half Dice 6 g
W 10 x D 22 x H 28 mm



NW L 458
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R404A
R452A

VOLTAGE V/Hz/ph

230/50/1

RECOMMENDED BINS

Head	Bins		kg
NW 458	✓	SB393	181
	✓	SB530	243
	CBT48EAMCD CBT48FMCD	SB948	406

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation
- CBTxxxxxxxx : need additional bin top

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10	+10

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine 230 kg

NW 458

EASY


Scotsman®
Ice Systems

Modular Ice Machine 230 kg

Item #:

Project:

Quantity:

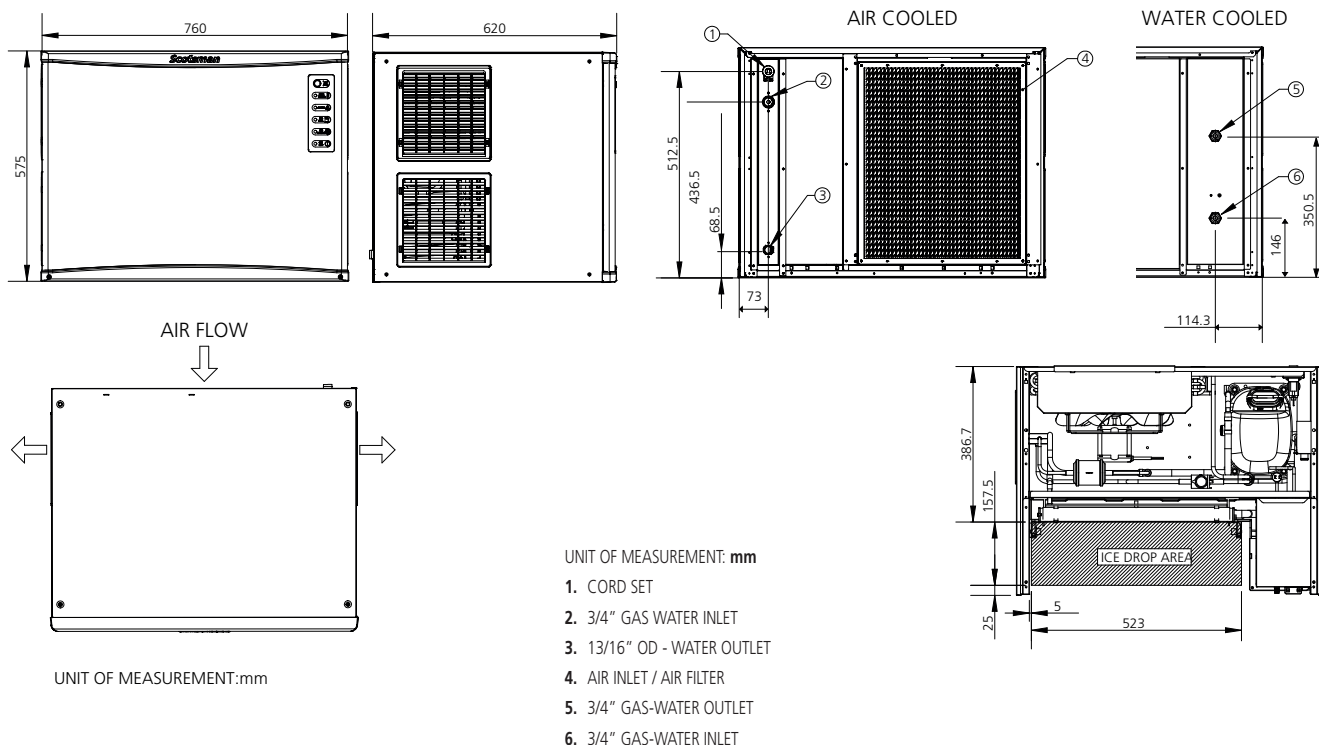

UNIT DATA				SHIPPING DATA				All data refer to R404A refrigerant models			
Size (W x D x H)		760 x 620 x 575 mm		Carton (W x D x H)		830 x 690 x 720 mm					
Net weight		73 kg		Weight		87 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NW H 458 AS	230/50/1	240	230	175	13.2	23.1	11.4	1000	2600	3 x 1.5	16
NW H 458 WS	230/50/1	230	230	180	9.9	17.9	84.3	1000	2600	3 x 1.5	16
NW L 458 AS	230/50/1	230	210	155	14.8	22.9	9.4	1000	2600	3 x 1.5	16
NW L 458 WS	230/50/1	230	215	180	9.9	17.9	84.3	1000	2600	3 x 1.5	16
NW 458 AS	230/50/1	230	210	165	13.9	22.9	10.6	1000	2600	3 x 1.5	16
NW 458 WS	230/50/1	230	220	190	9.5	18.0	89.0	1000	2600	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions