



CS-CRE-1-B(E)




CS-CRE-2-B(E)

安全 SAFE

採用燃燒控制器分步控制電磁閥，火種未點燃時，主氣閥不會打開；風機供風不正常，供氣不正常，意外熄火等故障，1秒鐘關閉燃氣；一鍵式風機、電子打火和離子熄火保護設計。Solenoid safety valve control, the main gas valve won't be opened until the pilot ignites; Gas will be cut off in 1 second once the air or gas is supplying abnormally, or an unexpected flame failure appears, prevent the explosion accident.

耐用 DURABLE

臺面整件成型，方便清潔；隔熱臺面，底部設計30mm厚的玻璃棉；爐頭內冷的氣體吸收爐頭外殼熱量，降低爐頭溫度，提高爐頭的使用壽命；整體爐磚，防止漏火損壞爐體；感應針使用溫度超過1200度，不易燒壞。Countertop is integrally formed by punching, equipped with 30mm thick glass wool for insulation; The heat from the shell of the burner will be absorbed by the cold air inside the burner, reduce burner temperature, increase its lifetime; induction needle temperature over 1200 degrees and difficult to burn out.

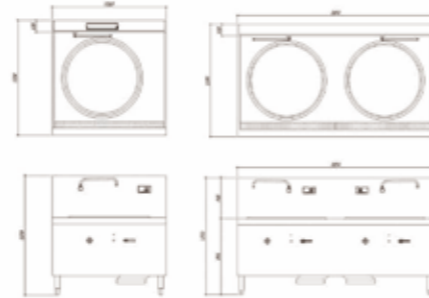

節能環保 ENVIRONMENTAL AND SAVING ENERGY

鼓風預混燃燒，噪音小於65分貝，燃燒充分，一氧化碳排放量小於0.01%；燃氣和空氣混合燃燒充分，火力猛勁，熱效率高。與一般滿風爐頭相比可節能30%以上。每個爐頭獨立配置風機，使用行鍵風制實現風氣聯動開關，可調節供風大小。

Environmental Premix burner, noise is less than 65db, Gas full mix with air, completed combustion, powerful fire, high thermal efficiency, saving energy up to 30% than general mixing burner. Each burner is equipped with a blower which adopts the chain wind system to realize the linkage switch, the blowing rate is adjustable.

規格參數表

產品名稱 Product Name	型號 Model	規格(mm) Dimension	熱負荷 Heat Load	進氣口 Gas Inlet	進水/排水 Water Inlet Drainage	風機 Blower
燃氣環保單頭大炒爐	CS-CRE-1-B(E)	1200x1200x810+440	48kW	DN20/DN25	DN15/DN40	220V/250W
燃氣環保雙頭大炒爐	CS-CRE-2-B(E)	2100x1200x810+440	48kWx2	DN40/DN50	DN15/DN40	220V/250W*2


型號(E)表示帶電磁安全制 (E) stand for electromagnetic valve control
進氣口DN25/DN50適用於人工煤氣 Gas inlet DN25/DN50 support TG



SBE-1DE-G



SBE-1DC-G

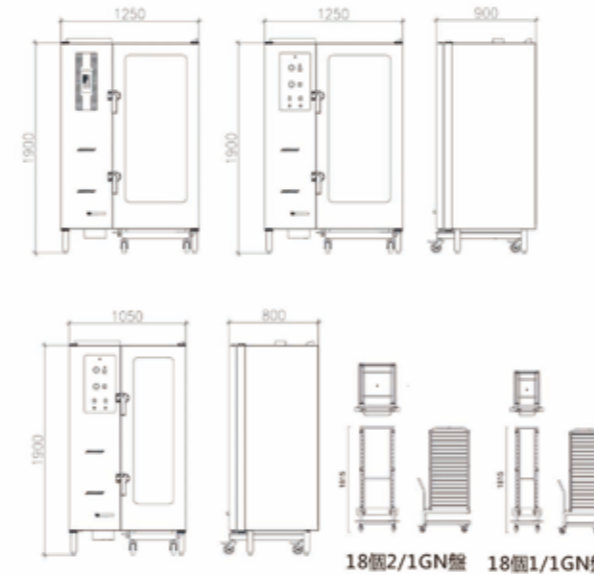

產品特性 FEATURES

水膽採用1.5mm耐熱不銹鋼加工，4條S形火管結構，表面隔熱處理。Water tank is made of 1.5mm heat-resisting stainless steel, 4pcs S-type fire tube, equipped with thermal insulation material.
兩組獨立的燃氣燃燒控制系統，脈衝電子點火，離子熄火保護。Two sets independent combustion system, pulse electrical ignition, flame failure ion detective device.
設置長明火種，超溫缺水保護，防止幹燒。Include stand by pilot, over temperature protection, water lack protection to prevent burning water tank.
設置時間控制，可根據需要設定工作時間（0-60分鐘）。Timer, easy to set the operation time from 0-60Mins based on users' needs.
設置櫃內照明功能。With lighting function in cabinet.
設置補水箱，全不銹鋼浮球自動補水。Automatic control S/S floating ball, since less water fill, water full automatic stop.
硬水地區使用該設備必須裝配軟化水設置。Using this unit in the solid water area should be equipped with water softening device.

規格參數表

產品名稱 Product Name	型號 Model	規格(mm) Dimension	熱負荷 Heat Load	進氣口 Gas Inlet	進水/排水 Water Inlet Drainage	電功率 Rated	備註 Remarks
燃氣環保車仔蒸櫃(電子版控制)	SBE-1DC-G	1250x900x1900	56kW	DN25	DN15/DN40	220V/3kW	可放18個2/1盤
燃氣環保車仔蒸櫃(機械式控制)	SBE-1DE-G	1250x900x1900	56kW	DN25	DN15/DN40	220V/3kW	可放18個2/1盤
燃氣環保車仔蒸櫃(機械式控制)	SBE-1SE-G	1050x800x1900	56kW	DN25	DN15/DN40	220V/3kW	可放18個1/1盤

型號(E)表示帶電磁安全制 (E) stand for electromagnetic valve control
燃氣額定壓力(Rated gas pressure)：天然氣為(NG)2000Pa, 人工煤氣為(TG)1000Pa, 石油氣為(LPG)2800Pa