



CS-CSE-2S(E)



CS-RSE-2S(E)



安全便捷 SAFE AND QUICK

兩個主火閥門控制多個爐頭，可選擇不同蒸汽出量，有快蒸、慢蒸和保溫三種功效；配置電磁安全制，意外熄火等故障，1秒鐘關閉燃氣；電子點火，一鍵式操作，燃燒無需風機鼓風；設置蒸汽開關和蒸汽安全排放口，使用安全方便。


Tow main fire valves control several burners, different steam producing rate can be set, three kinds of steaming functions, quick steaming, slow steaming and warming, equipped with soleniod safety valve, unexpected flame failure protection, gas will be cut off in 1 second if there was an unexpected breakdown; electronic ignition controlled by one button, blower is not required for burning; equipped with steam switch and outlet for safety.



节能环保 ENVIROMENTAL AND SAVING ENERGY

火管結構水膽，受熱面積大、熱效率高，熱效率大於85%，燃氣用量節約；爐頭燃燒完全，煙氣中CO含量≤0.05%；燃燒噪音小於65dB(A)；設置超溫缺水保護，防止幹燒損壞水膽。


Water tank with fire tubes structure largens the heating area, thermal efficiency is over 85%, reduces the gas consumption by 20% ; burner can be completely working, carbon dioxide in the smoke is less than 0.05% combustion noise is less than 65dB(A); equipped with over temperature an water lack protection to prevent the water tank from burning out .

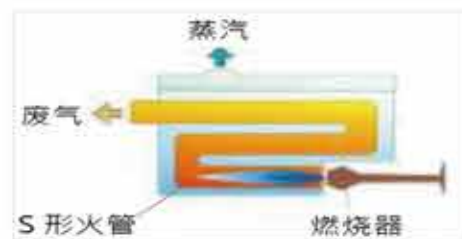

蒸籠水膽使用不銹鋼加工，火管加熱結構內部設置“S”形火管，通過設置在補水箱內的浮閥自動控制入水。

Water tank is made of heat-resisting stainless steel, 4pcs S-type fire tube, automatically supplement water, stainless steel floating ball to replenishment, to make sure the tank produce continuity and stability steam.

規格參數表

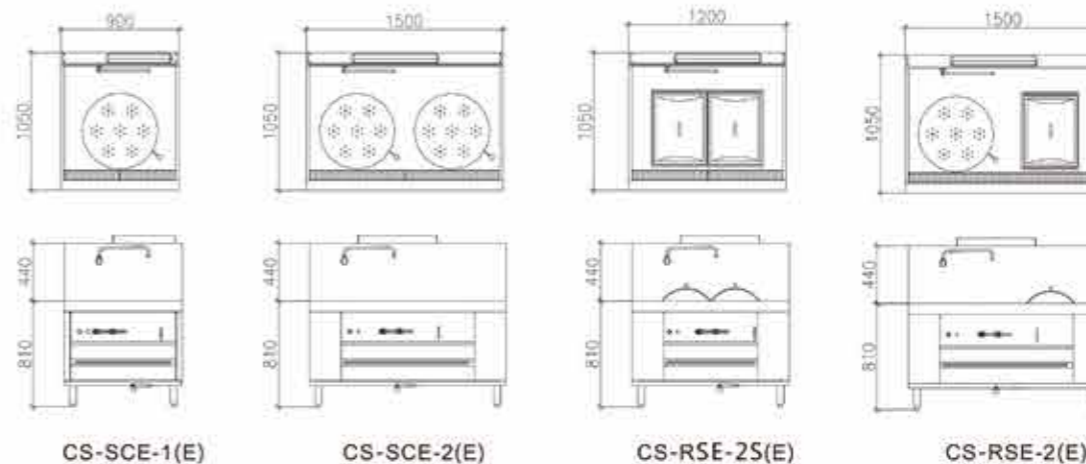

產品名稱 Product Name	型號 Model	規格(mm) Dimension	熱負荷 Heat Load	進氣口 Gas Inlet	進水/排水 Water Inlet Drainage	備註 Remarks
燃氣環保單頭蒸爐	CS-CSE-1S(E)	900x1050x810+440	42kW	DN20/DN25	DN15/DN40	
燃氣環保雙頭蒸爐	CS-CSE-2S(E)	1500x1050x810+440	56kW	DN20/DN25	DN15/DN40	
燃氣環保雙頭腸粉爐	CS-RSE-2S(E)	1200x1050x810+440	48kW	DN20/DN25	DN15/DN40	
燃氣環保單頭蒸爐連單頭腸粉爐	CS-RSE-2(E)	1500x1050x810+440	56kW	DN20/DN25	DN15/DN40	

型號(E)表示帶電磁安全制 (E) stand for electromagnetic valve control;
進氣口DN25/DN50適用於人工煤氣 Gas inlile DN25/DN50 support TG;
燃氣額定壓力(Rated gas pressure) : 天然氣為(NG)2000Pa, 人工煤氣為(TG)1000Pa,石油氣為(LPG)2800Pa ;

