



CS-1PH



CS-2CP



CS-3P

產品特性:


- 电热蒸柜系列产品, 全不锈钢机身结构
- 水胆采用1.5mm耐热不锈钢加工
- 内胆有保温材料包裹提高保温性能
- 设计低水位及超温保护功能
- 特别结构的硅胶门胶边, 柜门不漏蒸汽
- 自动进水, 防止电热管干烧
- 蒸层排水U型管结构, 防止蒸汽由下部外溢
- 硬水地区使用该设备必须装配软化水装置

FEATURES


- Electric steam cabinet, all stainless steel exterior body
- Water tank is made of 1.5mm heat-resistant stainless steel.
- Equipped with heat preservation materials wrapped by inner body, improve the effect of heat preservation.
- Low water level and over temperature protection.
- Silicon door edge of special structure, prevents the steam from leaking.
- Automatic water filling, prevents the heating-pipe from burning out.
- U-shape draining pipe on each layer, prevent the steam from spilling out from the bottom of the cabinet
- Using this unit in the solid water area should be equipped with water softening device .



CS-1PH

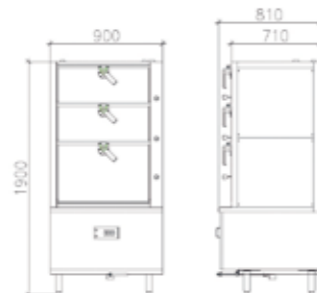

CS-2CP

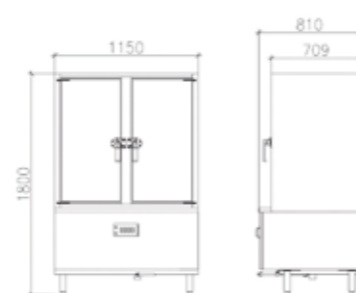

CS-3PH

規格參數表

產品名稱 Product Name	型號 Model	規格(mm) Dimension	電壓 Voltage	功率 Power	進水/排水 Water Inlet Drainage	備註 Remarks
電熱單門蒸櫃	CS-1PH	800x810x1800	380V	27kW	DN15/DN40	
電熱三門蒸櫃	CS-3PH	900x810x1900	380V	36kW	DN15/DN40	
電熱雙門對開蒸櫃	CS-27CP	1150x810x1800	380V	45kW	DN15/DN40	



CS-45P





CS-27H

產品特性:

- 电热蒸柜系列产品, 全不锈钢机身结构
- 水胆采用1.5mm耐热不锈钢加工
- 内胆有保温材料包裹提高保温性能
- 设计低水位及超温保护功能
- 自动进水, 防止电热管干烧
- 蒸层排水U型管结构, 防止蒸汽由下部外溢
- 硬水地区使用该设备必须装配软化水装置

FEATURES

- Electric steam cabinet, stainless steel exterior body
- Water tank is made of 1.5mm heat-resistant stainless steel.
- Equipped with heat preservation materials wrapped by inner body, improve the effect of heat preservation.
- Low water level and over temperature protection.
- Automatic water filling, prevents the heating-pipe from burning out.
- U-shape draining pipe on each layer, prevent the steam from spilling out from the bottom of the cabinet
- Using this unit in the solid water area should be equipped with water softening device .

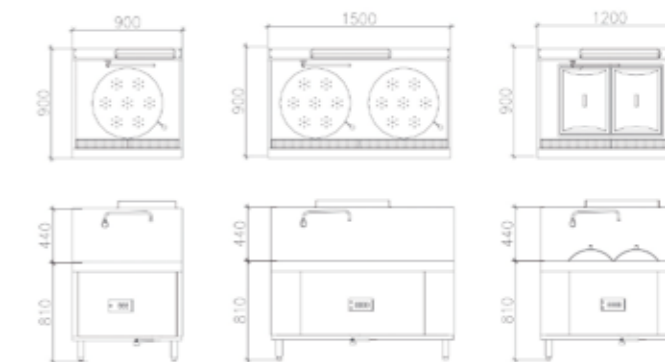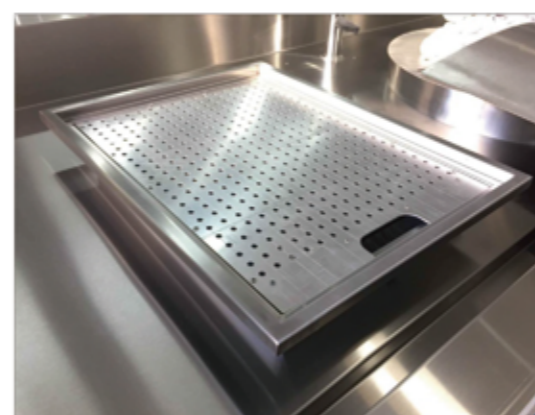

CS-27P

CS-45P

CS-27H

規格參數表

產品名稱 Product Name	型號 Model	規格(mm) Dimension	電壓 Voltage	功率 Power	進水/排水 Water Inlet Drainage	備註 Remarks
電熱單頭蒸爐	CS-27P	750x900x810+440	380V	27kW	DN15/DN40	配蒸板 水龍頭
電熱雙頭蒸爐	CS-45P	1500x900x810+440	380V	45kW	DN15/DN40	配蒸板 水龍頭
電熱雙頭腸粉爐	CS-27H	1200x900x810+440	380V	27KW	DN15/DN40	配腸粉蓋 水龍頭