


GLASS & DISHWASHERS WITH DOUBLE-WALL DOOR



**FEATURES**



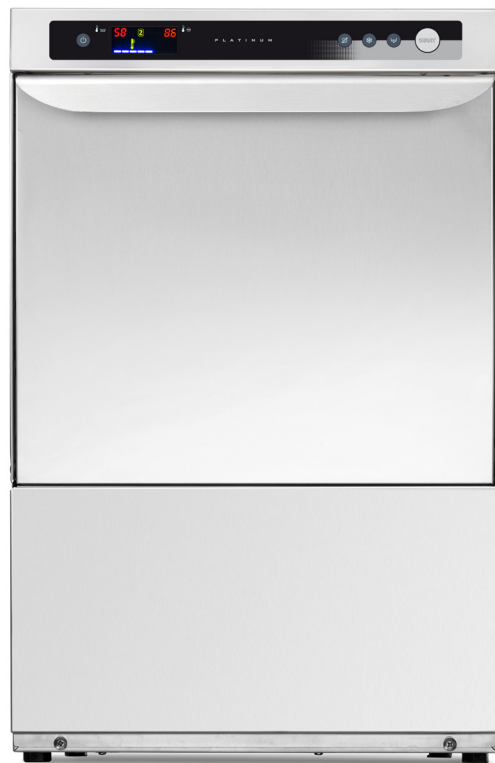

- AISI 304 structure.
- Sound and heat proof door.
- Double skin door with security microswitch.
- Deep-drawn and sloped tank for a perfect total drain.
- Overflow and drain pipes integrated system, for a triple protection of the washing pump.
- Non-drip roof to safeguard the hygiene of the freshly washed dishes.
- Light wash and rinse arms, granting the best efficiency also when the water pressure is weaker.
- Easy to remove nozzles, to help with daily cleaning operations.
- Back flow prevention valve.
- Rinse-aid dispenser (peristaltic version on demand).
- Thermostop system: the rinse starts only when the water in boiler reaches 85°C.
- Electronic version available with 4 preset washing programs.
- Available with automatic water softener.

**OPTIONS**


- Drain pump
- Detergent dispenser
- Special voltages on request
- Integrated water softener
- Upper wash arms

**TECHNICAL SPECIFICATIONS**

- Dimensions: 450 x 535 x 700 mm
- Power Supply: 230 V ~ 50 Hz
- Rack dimension: 400 x 400 mm

<p><b>CAPACITY</b></p>  305 H  LS -- Ø 295  400 x 400	<p><b>RACK EQUIPMENT</b></p> <ul style="list-style-type: none"> <li>• 2 x C121</li> <li>• 1 x 10728</li> <li>• 1 x 15060</li> </ul> 
--	---

## GLASS & DISHWASHERS WITH DOUBLE-WALL DOOR

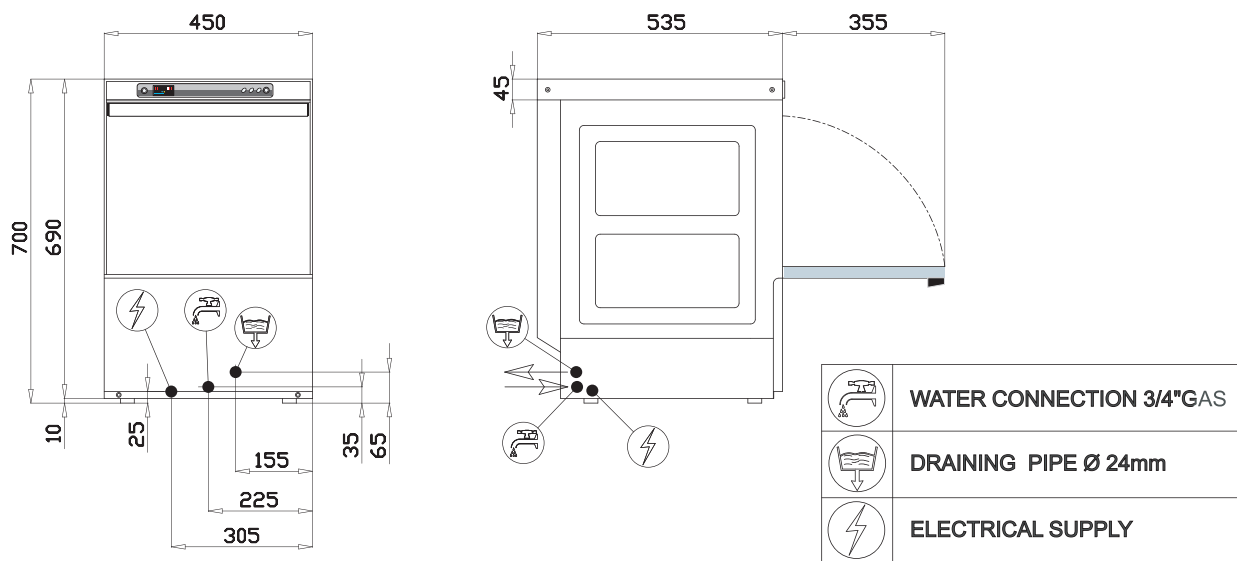

## TECHNICAL DATA

EXTERNAL DIMENSIONS				
width	450 mm			
depth	535 mm			
height	700 mm			
WEIGHT	37 Kg			
VOLTAGE	230V 50Hz			
POWER REQUIRED	3200 W			
WATER HARDNESS	2-8 °F			
INLET WATER PRESSURE	200-400 kPa			
CROCKERY DIMENSIONS				
plates diameter	295mm			
dishes max. height	305 mm			
WASHING CYCLES	1 (60)	2(90)	3(120)	4(180)
WATER SUPPLY 55°C				
racks/h(*) (1)	60	40	30	20
WATER SUPPLY 10°C				
racks/h(*) (1)	16	16	16	16
WATER CONSUMPTION / CYCLE (WATER PRESSURE 200KPA)	1.8 L			
BOILER CAPACITY	3.4 L			
BOILER HEATING ELEMENT	2800 W			
RINSING TEMPERATURE (SET)	85 °C			
TANK CAPACITY	14.5 L			
TANK HEATING ELEMENT	1250 W			
TANK TEMPERATURE (SET)	55 °C			
PUMP POWER	400 W (185 L/min***)			

DRAIN PUMP (OPTIONAL)	25 W h MAX drainig 0.8m (40 L/min***)
NOISE	60.6(CF) 61.2 (LS)

(\*) standard thermostat (\*\*\*) maximum flow rate  
 1. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.