



OG8009/N - Lincat Opus 800 Natural Gas Counter-top Boiling Top - W 300 mm - 15.0 kW

Perfect for large pubs and restaurants, school canteens, care homes and hospitals, the Opus 800 Gas 2 x Boiling Top come with individual heavy-duty single cast iron supports, which are built to withstand the rigours of the busiest kitchen.

- ✓ Powerful 7.5kW dual concentric Burners for focused heat distribution from a fast boil to a low simmer
- ✓ Individual heavy-duty single cast iron supports, built to withstand the rigours of the busiest kitchen
- ✓ Low flue to allow use of the complete hob top
- ✓ Gas Boiling Tops

Specifications

Summary

| | |
|-----------------------------|-----------------------------------|
| Brand | Lincat |
| Range | Opus 800 |
| Power Type | Gas |
| Gas Type | Natural Gas |
| Unit Type | Counter-top |
| Available in UK Only | No |
| UK Warranty | 2 Years Parts and Labour Warranty |
| Export Warranty | Contact your local dealer |
| GTIN | 5056105102359 |

Power and Performance

| | |
|----------------------------|------------|
| BTU per Hour | 51,180 |
| Total Power kW | 15.0 |
| Temperature Control | Mechanical |
| Rating per Hob kW | 7.5 |

Key Specifications

| | |
|-----------------------|---|
| Number of Hobs | 2 |
|-----------------------|---|

Weights and Dimensions

| | |
|----------------------------------|-----|
| Unit Height (External) mm | 412 |
| Unit Width (External) mm | 300 |
| Unit Depth (External) mm | 800 |
| Net Weight Kg | 31 |

Supply Connections

| | |
|--|--------|
| Requires Installation | Yes |
| Requires Electrical Supply | No |
| Gas Connection BSP | 1/2" |
| Gas Consumption at full rate Natural m³ per Hour | 1.35 |
| Gas Pressure Natural mbar | 20 |
| Total heat input at full rate Natural kW | 15.0 |
| Total heat input at full rate Natural BTU per hour | 51,182 |




Shipping

| | |
|-------------------------|------|
| Packed Weight Kg | 34.1 |
| Packed Height cm | 64 |
| Packed Width cm | 85 |
| Packed Depth cm | 45 |

Available Accessories

| | |
|---------------|---|
| CH01 | Caterflex Hose 1/2" - 1 Metre - for use with units up to 66,000 BTU |
| CH02 | Caterflex Hose 1/2" - 1.5 Metre - for use with units up to 56,000 BTU |
| OA8934 | Lincat Opus 800 Free-standing Floor Stand with Legs - for units W 300 mm |
| OA8970 | Lincat Opus 800 Free-standing Pedestal with Doors and Legs - for units W 300 mm |

Technical Picture

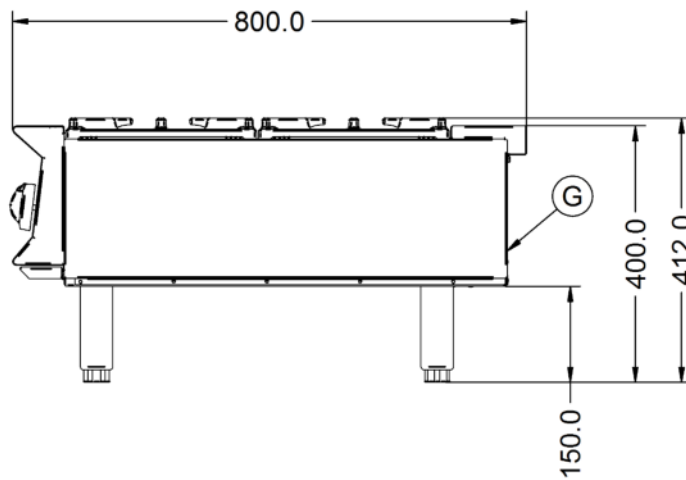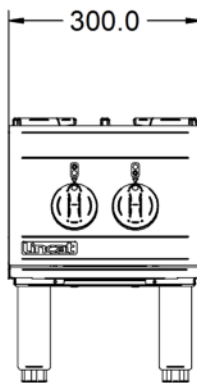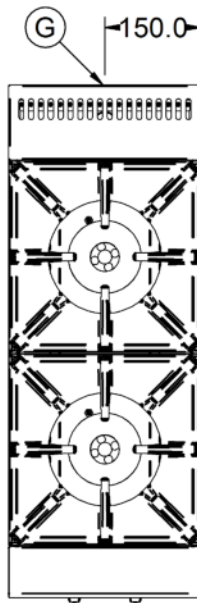

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm